

## 4 bar STEAM GENERATOR – GV/RIO(4)

### Reduced regulatory constraints

40 to 1500kW

Gas burner Instantaneous

Energy-efficient

Fluid heating


Clean steam Easy integration

All stainless steel design Fast response

Direct steam injection

Compact Versatile

Energy self-sufficient

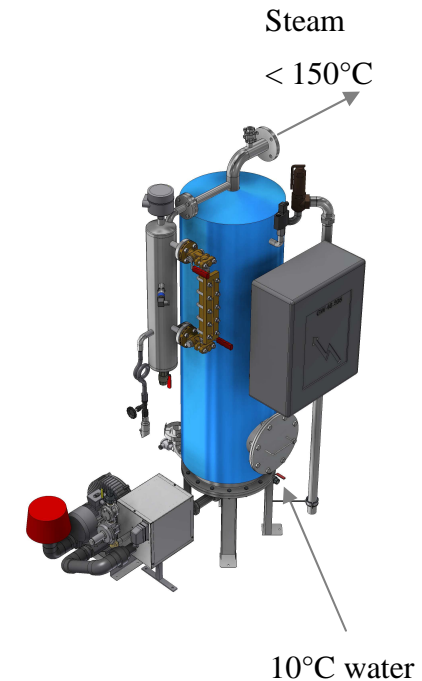

### Winning features:

- ✓ Energy savings up to 30%  
Reduced CO<sub>2</sub> emissions
  - ✓ Efficiency up to 93%/NCV\*
  - ✓ Capacitive sensor for water level regulation
  - ✓ Biogas-compatible
  - ✓ Shorter water circuit, smaller energy loss
  - ✓ Reduced maintenance costs thanks to robust construction
  - ✓ Can be installed in facilities with ceiling height limited to 2.50m
  - ✓ 316L stainless steel construction for use in all environment types
  - ✓ Reduced maintenance costs thanks to robust construction
- ✓ **Food industry:** Clean steam directly usable for food contact processes

\* : Depends on the features of your installation and operating methods



## Applications

---

### Food industry

Cooking  
Double-wall tank heating  
CIP station

### Breweries

Malting / stirring  
Drum washing / sterilisation  
CIP station

### Surface treatment

Degreasing metal parts

## References

---

